

5 常用型号推荐


型号规格	瞬时功率	电池容量	连续功率	输入电压	输出电压	备注
BR-DP22211	800W	18Ah	200W	AC220V	DC220V	常用型号
BR-DP12211	600W	18Ah	200W	AC200V	DC220V	
BR-DP13111	600W	24Ah	100W	AC220V	DC220V	
BR-DP33211	1000W	24Ah	200W	AC220V	DC220V	
BR-DP1111X	600W	12Ah	100W	AC220V	*	可选型号
BR-DP1211X	600W	18Ah	100W	AC220V	*	
BR-DP1311X	600W	24Ah	100W	AC220V	*	
BR-DP2211X	800W	18Ah	100W	AC220V	*	
BR-DP2311X	800W	24Ah	100W	AC220V	*	
BR-DP3311X	1000W	24Ah	100W	AC220V	*	
BR-DP1112X	600W	12Ah	100W	AC100V	*	
BR-DP1212X	600W	18Ah	100W	AC100V	*	
BR-DP1312X	600W	24Ah	100W	AC100V	*	
BR-DP2212X	800W	18Ah	100W	AC100V	*	
BR-DP2312X	800W	24Ah	100W	AC100V	*	
BR-DP3312X	1000W	24Ah	100W	AC100V	*	
BR-DP11211	600W	12Ah	200W	AC220V	DC220V	
BR-DP13211	600W	24Ah	200W	AC220V	DC220V	
BR-DP23211	800W	24Ah	200W	AC220V	DC220V	

注：上表中“型号规格”栏中的“X”表示其代码可以是1、2、3、4，“输出电压”栏的“*”表示输出电压可以是DC220V、DC110V、DC48V、DC24V，代码与输出电压的对应关系如“型号说明”所述。


6 安装与接线

6.1 外形尺寸 宽*高*深:152*222*96 (mm)


6.2 安装方法 嵌入式安装,开孔尺寸 宽*高:143*190 (mm)





12Ah电池组



18Ah电池组



24Ah电池组

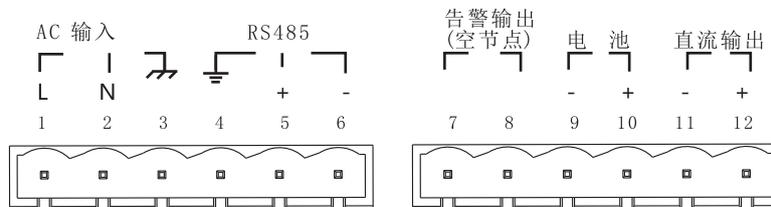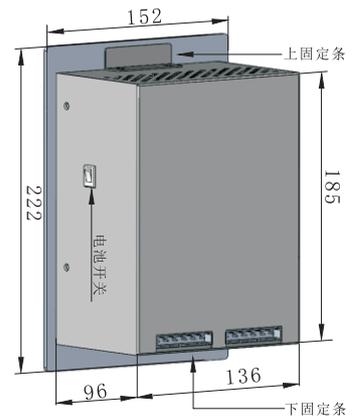

特别声明

对于额定输入电压为AC100V的设备，切勿接入AC220V电源！